


## BK SERIES | Non-Clog Submersible Pump


The BK Series features with a standard built in internal cooling jacket design. The BK series offers continued cooling when low sump level may be present. This is the right model to handle every application to efficiently transfer the most aggressive liquids. Solids handling non clog submersible pump featuring a standard cooling jacket for operating at low water levels without overheating. 30HP - 60HP, three phase. 6"-16" discharge sizes.




**Discharge Size: 6" - 8"**

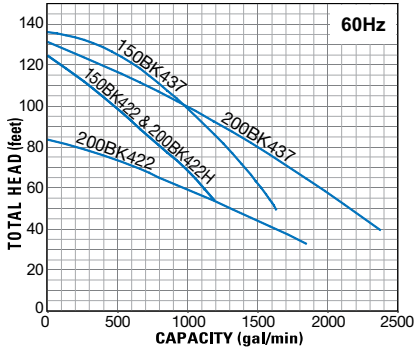


**Discharge Size: 10"**

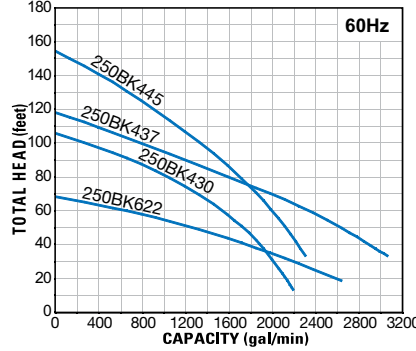


**Discharge Size: 12"**

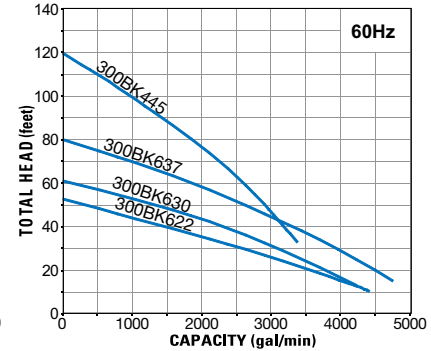


**Discharge Size: 14" - 16"**

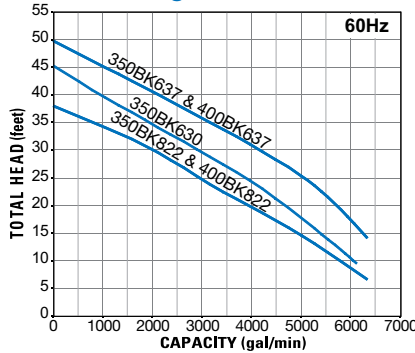

**Dimension: Free Standing A / B / C**

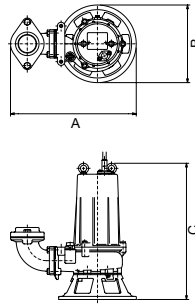

**Dimension: Guide Rail Fitting (TO / TOS) D / E / F**

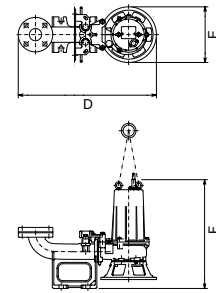

Three Phase Model	Motor Output (HP)	Rated Current Amps		RPM	Discharge Size (in.)	Dimensions (in.)						Max. Solids Dia. (in.)
		460V	575V			Free Standing Models			TOS & TO Guide Rail Models			
						A	B	C	D	E	F	
150BK422	30	39	31.5	1800	6	38 7/8	21 1/4	52 1/8	46 1/4	20 1/2	51 5/16	2.95
200BK422H	30	39	31.5	1800	8	41 1/16	21 1/4	52 1/8	54 1/8	20 1/2	52 1/16	2.95
200BK422	30	39	31.5	1800	8	42 13/16	24 7/16	51 15/16	53 3/8	21 5/8	51 15/16	2.95
250BK622	30	41	33	1200	10	51 11/16	29 15/16	63 1/4	62 7/16	26 5/16	60 13/16	3.11
300BK622	30	41	33	1200	12	53 3/4	29 15/16	63 9/16	66 5/16	27 3/8	63 11/16	3.27
350BK822	30	44	35.5	900	14	58 9/16	31 1/16	67 5/8	72 5/8	28 3/4	68 1/4	4.11
400BK822	30	44	35.5	900	16	62 5/16	31 1/16	67 5/8	83 9/16	28 3/4	70 9/16	4.11
250BK430	40	52	42	1800	10	51	28 1/2	61 1/8	61 5/8	25 1/2	58 1/2	2.26
300BK630	40	56	45	1200	12	53 3/4	29 15/16	67 3/16	66 5/16	27 3/8	67 5/16	2.76
350BK630	40	56	45	1200	14	58 9/16	31 1/16	68 3/4	72 5/8	28 3/4	69 5/16	3.15
150BK437	50	63	50	1800	6	42 11/16	28 1/2	63 11/16	51 7/16	24 7/16	57 1/16	1.57
200BK437	50	63	50	1800	8	46 7/8	28 1/2	64 9/16	56 1/4	24 3/8	60 1/8	1.57
250BK437	50	63	50	1800	10	51	28 1/2	64 3/4	61 5/8	25 1/2	62 1/16	2.64
300BK637	50	67	54	1200	12	53 3/4	29 15/16	67 3/4	66 5/16	27 3/8	67 7/8	3.60
350BK637	50	67	54	1200	14	58 9/16	31 1/16	69 5/16	72 5/8	28 3/4	69 15/16	4.27
400BK637	50	67	54	1200	16	62 5/16	31 1/16	69 5/16	83 9/16	28 3/4	72 5/16	4.27
250BK445	60	77	62	1800	10	51 11/16	29 15/16	63 9/16	62 1/8	26 1/4	61 1/4	1.77
300BK445	60	77	62	1800	12	53 1/16	28 1/2	65 1/2	65 5/8	26	64 3/4	2.76