


**KTZ422-61
KTZ622-61**

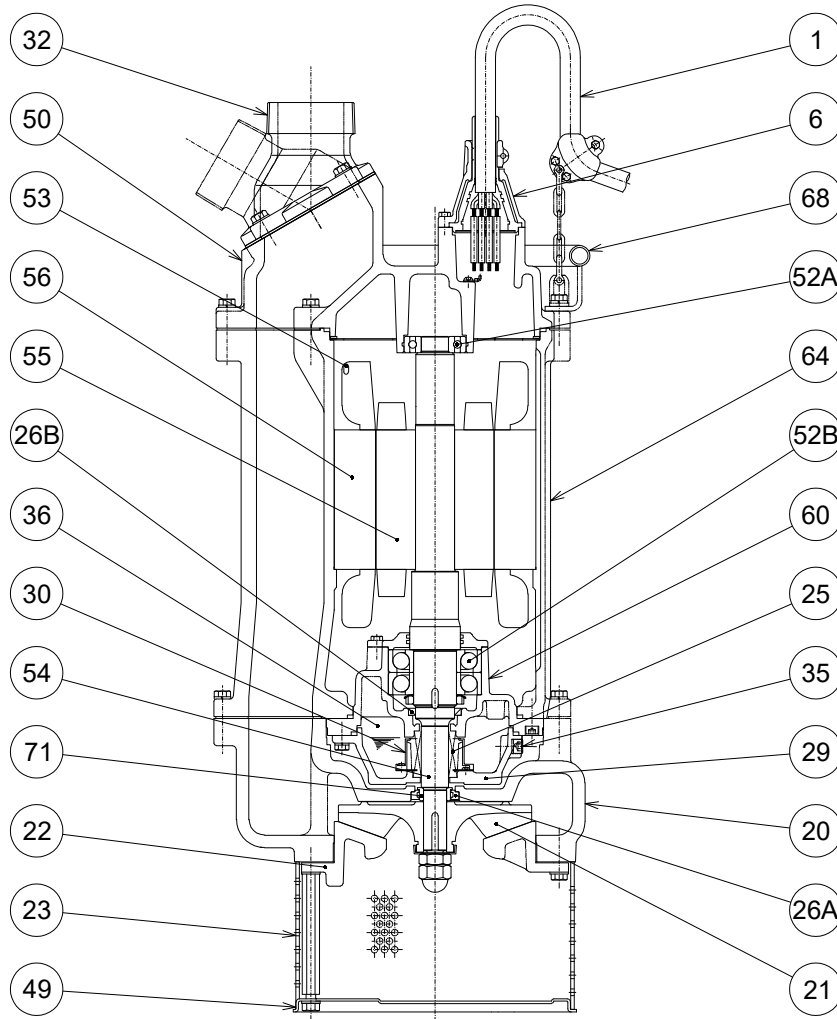

| ITEM# | DESCRIPTION | MAIN MATERIAL / NOTE | ASTM, AISI CODE | RELATED DIN CODE | Q'TY |
|-------|----------------------|--------------------------------------|---------------------------|--------------------------------|------|
| 1 | Power Cable | Chloroprene Sheath AWG6/4, 14/2-50ft | | | 1 |
| 6 | Stuffing Box | Cast Iron | A48M Class30B | EN 1561 GJL-200 | 1 |
| 20 | Pump Casing | Cast Iron | A48M Class30B | EN 1561 GJL-200 | 1 |
| 21 | Impeller | High Chrome Cast Iron | A532 Class III TypeA | DIN 1695 G-X260Cr27 | 1 |
| 22 | Suction Cover | Ductile Cast Iron | A536 65-45-12 | EN 1563 GJS-500-7 | 1 |
| 23 | Suction Strainer | Steel (Cold Rolled) | A109/A1008 | EN 10130 | 1 |
| 25 | Mechanical Seal | Silicon Carbide / H-35T | | | 1 |
| 26A | Labyrinth Ring | Stainless Steel | S 30400 | 1.4301 | 1 |
| 26B | Oil Seal | Nitrile Butadiene Rubber / SC-50689 | | | 1 |
| 29 | Oil Casing | Cast Iron | A48M Class30B | EN 1561 GJL-200 | 1 |
| 30 | Oil Lifter | PBT Plastic W/(GF+MD)40 | | | 1 |
| 32 | Discharge Connection | Cast Iron / NPT 4" (or 6") | A48M Class30B | EN 1561 GJL-200 | 1 |
| 35 | Oil Plug | Stainless Steel | S 30400 | 1.4301 | 1 |
| 36 | Lubricant | Turbine Oil ISO VG32 or SAE 10W-20 | | | |
| 49 | Bottom Plate | Steel (Cold Rolled) | A109/A1008 | EN 10130 | 1 |
| 50 | Motor Bracket | Cast Iron | A48M Class25B | EN 1561 GJL-150 | 1 |
| 52A | Upper Bearing | #6307ZZC3 | | | 1 |
| 52B | Lower Bearing | #7311DBC3 | | | 1 |
| 53 | Motor Protector | | | | 3 |
| 54 | Shaft | Stainless Steel | S 42000 | 1.4028 | 1 |
| 55 | Rotor | | | | 1 |
| 56 | Stator | | | | 1 |
| 60 | Bearing Housing | Cast Iron | A48M Class25B | EN 1561 GJL-150 | 1 |
| 64 | Motor Housing | Cast Iron | A48M Class25B | EN 1561 GJL-150 | 1 |
| 68 | Handle | Steel Pipe & Steel | A53 Type F & A283 Grade D | DIN 1615 St 33 & EN 10025 S275 | 1 |
| 71 | Shaft Sleeve | Stainless Steel | S 40300 | 1.4000 | 1 |