


## EPT5 MOUNTED TRASH PUMP

Industrial duty 6-inch trash pump: Powered by Honda gas engine / Kohler diesel engine.

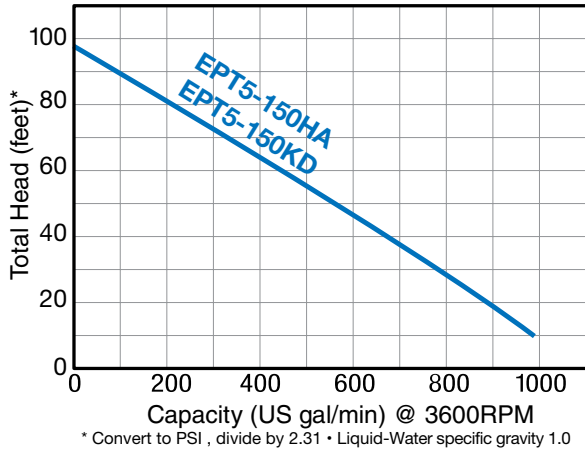

### EPT5-150HA (Honda Gas Engine) EPT5-150KD (Kohler Diesel Engine) Trash Pump Features

- Cast Aluminum Casing and Adapter
- Cast Iron Wear Plate, Volute and Manifold
- Stainless Steel Impeller
- Silicon Carbide Mechanical Seal and Buna O-Rings and Flapper / Check Valve
- 6" NPT Port Size
- Self Priming to 20ft
- Available with Honda GX670 Gas Engine or Kohler KDW1003 Diesel Engine (Final Tier 4)
- Solids Handling to 3" Diameter
- Unique Slide Mechanism permits complete service of pump without removing hoses or removing pump components from trailer
- Includes Seal Wash Feature for extended seal life
- 12 VDC Electric Start; Digital Tachometer / hourmeter included
- D.O.T. Approved Trailer - See your state and local codes for registration

Model	Discharge Suction Size (inches)	Engine Type	Engine	Max. Output (hp/rpm)	Dimensions (inches)			Shipping Weight (lbs.)
					Length	Width	Height	
EPT5-150HA	6" NPT Coupling	Unleaded Gasoline	Honda GX670	24.0 / 3600	99	48	60	1125
EPT5-150KD	6" NPT Coupling	Diesel	Kohler KDW1003	23.4 / 3600	99	48	60	1250


## EPT4-150 - HEAVY DUTY TRASH PUMP

Heavy Duty Prime Assisted & Sound Attenuated Priming Assisted Trash Pump

Priming Assisted  
EPT4-150



Sound Attenuated  
Priming Assisted  
EPT4-150Q

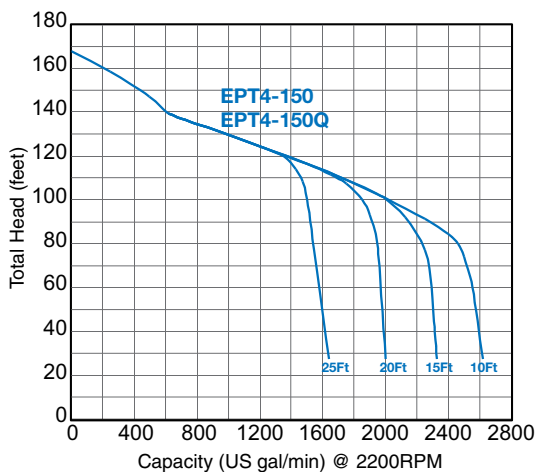

### EPT4-150 / EPT4-150Q Features

- Vacuum assisted pump that primes and re-primed by use of a compressor running high pressure air across a venturi which creates a vacuum
- Heavy-duty engine: Consult factory for more details
- With electric start and 60 gallon fuel tank for a runtime at full of load of 24 hours
- Passes 3" spherical solids
- Mechanical seal is tungsten and silicon carbide seal faces, viton elastomers, a 303 stainless steel hardware and spring. Seal system designed for dry running
- Heavy duty road trailer
- DOT Trailer
- LOFA auto start control panel with 50' floats assembly
- **Also available in 4", 8", and 12" versions - Please consult Factory**

Model	Discharge / Suction Size (inches)	Engine	Max. Output (hp/rpm)	Dimensions (inches)			Shipping Weight (lbs.)
				Length	Width	Height	
EPT4-150	6" ANSI Flange	Consult Factory	Consult Factory / 2200	136 1/2	67	67 7/8	Consult Factory
EPT4-150Q	6" ANSI Flange	Consult Factory	Consult Factory / 2200	161 1/2	76 1/8	79 13/16	Consult Factory